


GENERAL TOLERANCES ISO2768mk				SURFACE FINISH VALUES Ra									
LINEAR		ANGULAR (Length of the shorter side)		SUR. FINI.	N10	N9	N8	N7	N6	N5	N4	N3	N2
More than 0.5mm to 6mm	More than 6mm to 30mm	More than 30mm to 120mm	More than 120mm to 400mm	More than 10mm to 50mm	18.75µm	9.6µm	4.8µm	2.4µm	1.2µm	0.6µm	0.3µm	0.15µm	0.08µm
More than 0.5mm to 6mm	More than 6mm to 30mm	More than 30mm to 120mm	More than 120mm to 400mm	More than 50mm to 120mm	12.5µm	6.3µm	3.2µm	1.6µm	0.8µm	0.4µm	0.2µm	0.1µm	0.05µm
More than 0.5mm to 6mm	More than 6mm to 30mm	More than 30mm to 120mm	More than 120mm to 400mm	More than 10mm to 50mm	9.6µm	4.8µm	2.4µm	1.2µm	0.6µm	0.3µm	0.15µm	0.08µm	0.04µm



WEIGHT (gr):
13834.4

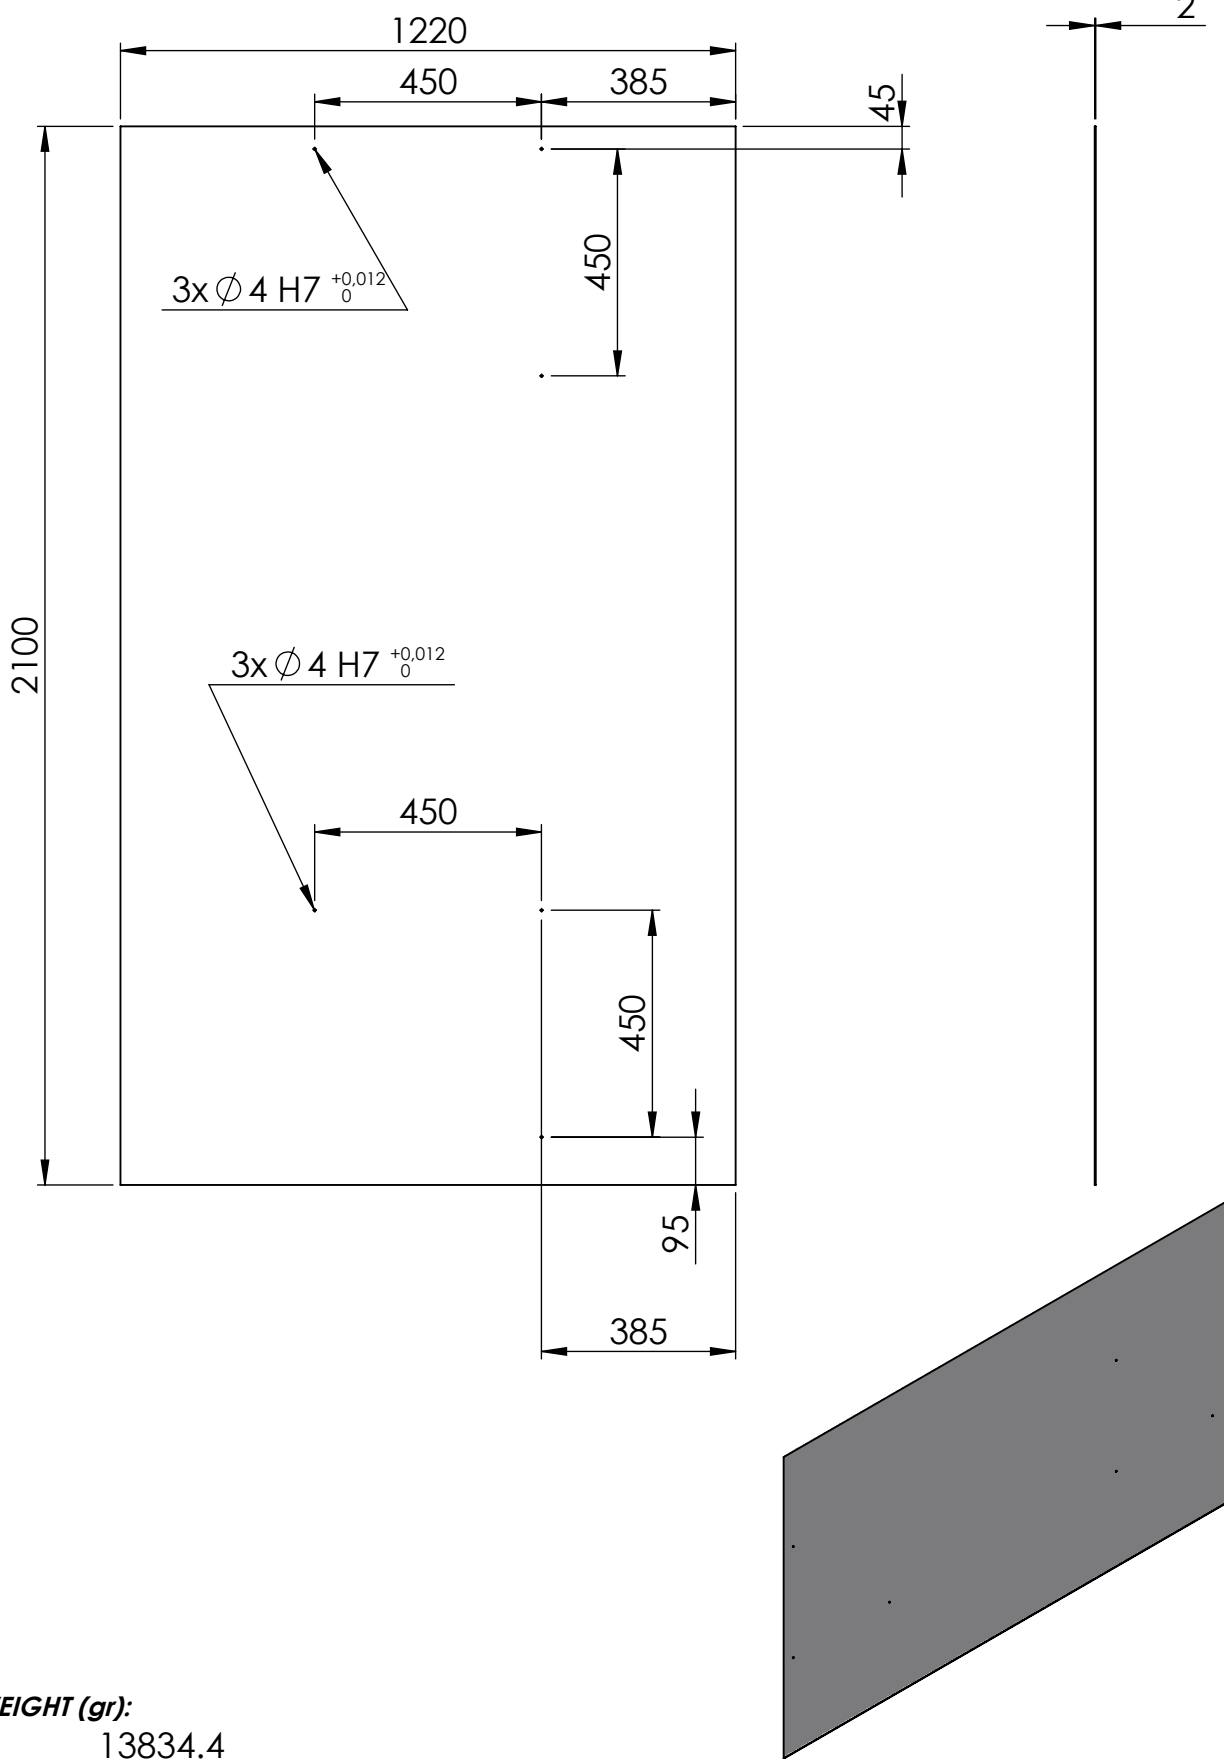

THIS DRAWING IS THE PROPERTY
OF MONDRAGON ASSEMBLY,
IT SHALL NOT BE REPRODUCED OR CIRCULATED
WITHOUT ITS AUTORIZATION

UNITS: *Milimeters*

PART DESCRIPTION:

TOOL

MATERIAL:

AW 6082 T6

TREATMENT:

— — —

GENERAL SPECIFICATIONS:

- TOLERANCES: ISO2768mK
- SURFACE FINISH N7
- DEBURRING/BREAK SHARP EDGES 0.5x45°

FILE NUMBER:

5967-31104-0009

CODE NUMBER:

PZ00171230

SCALE:
1:15

REVIEW:
B

A4

FORMAT

REQUESTED BY:

—

DATA:
25/03/2025

PROJECT:

—

STATION:

1